



SPECIAL LITE

QUALITY OUTDOOR PRODUCTS SINCE 1967

1634 Latrobe Derry Road
Loyalhanna, PA 15661
Toll Free: 1-800-365-0511
Phone: (724) 537-4711
Fax: (724) 537-9313
www.specialliteproducts.com
customer_service@specialliteproducts.com

MODEL NUMBER: BL-102


3 1/2" W x 43 1/4" H LED Triangle Bollard

How to Order:

Follow the below guide and table for item numbers.

1 BL-102- BLK / AB
QTY Item # Finish

OPTIC:	Wide Beam Spread
WATTAGE:	12w
VOLTAGE:	120-277V
KELVIN:	4000K
LENS:	Clear
FINISH:	BLK = Black, AB = Architectural Bronze

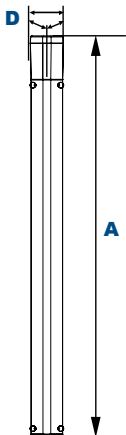

Dimensions

Length² (D)	3 1/2" (90mm)
Height (A)	43 1/4" (1099mm)

EasyLED Technology

The BL-102 with choice of lenses is designed to replace HID lighting systems up to 50w MH or HPS. The triangular shape provides a slender and unobtrusive appearance for pedestrian and parking area lighting for office parks, educational and medical facilities, multi-family housing, walkways and landscape accents.

Specifications and Features:

Housing:

Extruded Aluminum Housing with Flush Mounting Base, Flat Top.

Listing & Ratings:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750
IP66 Sealed LED Compartment.

Finish:

Textured Architectural Bronze or Black Powdercoat Finish Over a Chromate Conversion Coating.

Style:

Specially Designed White Cone Reflector that Minimizes Diode Brightness

Lens:

Clear UV-Stabilized Polycarbonate

Mounting Options:

Mounting Kit with 8" Zinc-Plated Anchor Bolts, Included.

EasyLED LED:

Aluminum Boards

Wattage:

Array: 12w, System: 11.8w; (50w HID Equivalent)

Driver:

Electronic Driver, 120-277V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 2kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

Controls:

Fixtures are NOT Designed for Use with Line Voltage Dimmers.

Warranty:

5-Year Warranty for -40°C to +50°C Environment.