



SPECIAL LITE

QUALITY OUTDOOR PRODUCTS SINCE 1967

1634 Latrobe Derry Road
Loyalhanna, PA 15661
Toll Free: 1-800-365-0511
Phone: (724) 537-4711
Fax: (724) 537-9313
www.specialliteproducts.com
customer_service@specialliteproducts.com

MODEL NUMBER: BL-105


14 1/4" W x 36" H x 6" Base LED Nautical Bollard

How to Order:

Follow the below guide and table for item numbers.

1 BL-105- BLK / AB
QTY Item # Finish

OPTIC:	Type III
WATTAGE:	18w
VOLTAGE:	120-277V
KELVIN:	4000K
LENS:	Clear
FINISH:	BLK = Black, AB = Architectural Bronze

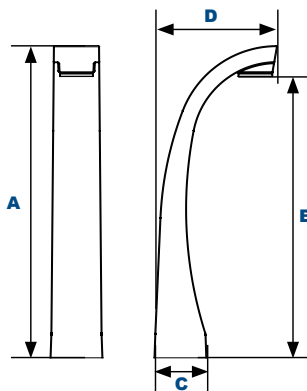

Dimensions	
Height (A)	36" (915mm)
Height (B)	32 1/2" (824mm)
Base² (C)	6" (155mm)
Width (D)	14 1/4" (362mm)

EasyLED Technology

The LEPG nautically inspired BL-105 Curve Bollard provides pedestrian and parking area lighting with a seaside flair. The specially designed UV-stabilized polycarbonate optics offer full-cutoff, excellently controlled uniform lighting designed to replace HID lighting systems up to 70w MH or HPS. These fixtures are ideal for a wide range of applications including parking areas, walkways and landscape accents.

Specifications and Features:

Housing:

Durable One-Piece Sand Cast Aluminum Housing Features 1/2" Thick Walls. Includes Flush Mounting Base & Vandal-Resistant Screws, Internal Driver Tray for Easy Maintenance.

Listing & Ratings:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750
IP65

Finish:

Textured Architectural Bronze or Black Powdercoat Finish Over a Chromate Conversion Coating.

Lens:

Clear UV-Stabilized Polycarbonate Vandal-Resistant Lens

Mounting Options:

Mounting Kit with 8" Zinc-Plated Anchor Bolts, Included.

EasyLED LED:

Aluminum Boards

Wattage:

18w: Array 18.2w, System 20.4w

Driver:

Electronic Driver, 120-277V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 2kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

Warranty:

5-Year Warranty for -40°C to +50°C Environment.