



# SPECIAL LITE

QUALITY OUTDOOR PRODUCTS SINCE 1967

1634 Latrobe Derry Road  
Loyalhanna, PA 15661  
Toll Free: 1-800-365-0511  
Phone: (724) 537-4711  
[www.specialliteproducts.com](http://www.specialliteproducts.com)  
[customer\\_service@specialliteproducts.com](mailto:customer_service@specialliteproducts.com)

## MODEL NUMBER: BL-103


10 1/4" W x 4 3/4" Dia. x 43 1/8" H LED Reveal Bollard

### How to Order:

Follow the below guide and table for item numbers.

1 BL-103- BLK / AB  
QTY Item # Finish

OPTIC:	Wide Beam Spread
WATTAGE:	25w
VOLTAGE:	120-277V
KELVIN:	4000K
LENS:	Clear
FINISH:	BLK = Black, AB = Architectural Bronze

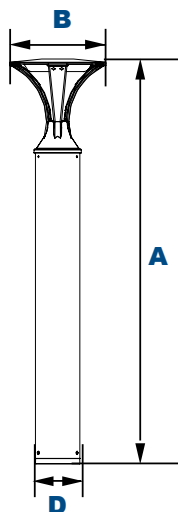

#### Dimensions

Width (B)	10 1/4" (260mm)
Diameter (D)	4 3/4" (120mm)
Height (A)	43 1/8" (1,095mm)

## EasyLED Technology

The BL-103 with UV-stabilized polycarbonate lenses and sealed optical compartments are designed to replace HID lighting systems up to 70w MH or HPS. These fixtures are ideal for retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities.

### Specifications and Features:

#### Housing:

Extruded Aluminum Housing with Flush Mounting Base, Flat Top, Sealed Driver Compartment.

#### Listing & Ratings:

ETL: Listed for Wet Locations, ANSI/UL 1598, 8750  
IP66 Sealed LED Compartment.

#### Finish:

Textured Architectural Bronze or Black Powdercoat Finish Over a Chromate Conversion Coating.

#### Lens:

Clear UV-Stabilized Polycarbonate

#### Mounting Options:

Mounting Kit with 8" Zinc-Plated Anchor Bolts, Included.

#### EasyLED LED:

Aluminum Boards

#### Wattage:

Array: 25w, System: 27.2w; (70w HID Equivalent)

#### Driver:

Electronic Driver, 120-277V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 2kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

#### Controls:

Fixtures are NOT Designed for Use with Line Voltage Dimmers.

#### Warranty:

5-Year Warranty for -40°C to +50°C Environment.